



## Exhaust Only Canopy Type Vapor Hood - Model D-VH / Model D-VH-B Specifications and Options

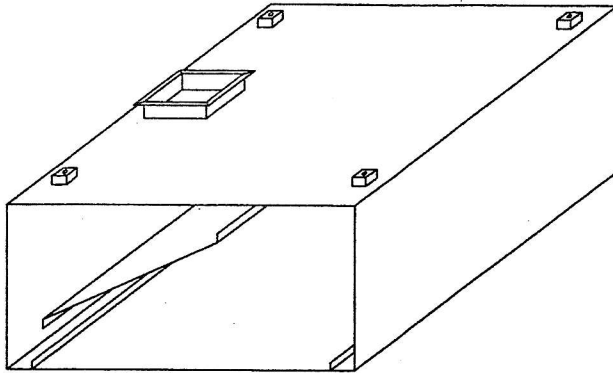

MODEL VH-B

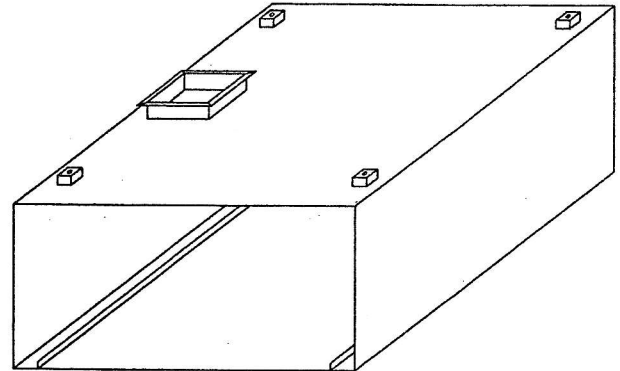

MODEL VH

### Hood Specifications:

- Material:** Entire hood is constructed of 18 gauge type 304 stainless steel with # 3 polish.
- Construction:** Exterior shell of hood is continuously welded liquid tight per NFPA-96. All exposed joints and seams are polished to the original finish.
- Hanger Brackets:** Heavy gauge steel hat channel brackets for 1/2" threaded hanger rod.
- Perimeter Gutter:** Continuous gutter provided around bottom of hood for added hood strength and collection of condensate vapors.
- Condensate Baffles:** (Model VH-B) includes full length, stainless steel internal baffles to help collect and drain condensate vapors into perimeter gutter.
- Exhaust Duct Collar:** 3" High Exhaust duct collar is factory installed in top of hood. Duct collar contains perimeter welding flange for field welding of exhaust duct.
- Approvals:** Hood is NSF Listed and built per state and local code requirements

### Hood Options:

- Material:** Entire hood constructed of 18 gauge or 16 gauge stainless steel or aluminized steel.
- Switch Panel:** Hood mounted or provide loose for wall mounting. Panel may contain various light and fan switch combinations as required for system operation.
- Lights:** U.L. Listed Incandescent type light fixtures located on 3' to 4' centers. Lights include shatterproof globes. Lights are pre-wired to junction box at top of hood.
- Drain Nipple:** Factory installed in perimeter gutter for condensate drain line as required.
- Filters:** Heavy duty aluminum mesh type filter at exhaust outlet. Filter is easily removable for cleaning.
- Ceiling Closure Panels:** Closure panels to close off space between top of hood and ceiling as required can be factory installed to hood top or provided loose for field installation.
- Side Skirts:** Left or Right end skirt to close off end of hood as required.
- Wall Panels:** S/S construction wall panels provided loose for field installation behind hood.
- Makeup Air Plenums:** Model RS (Rear Supply) or Model FP (Front Perforated) makeup air plenum provided loose for supply makeup up to 90% of Exhaust

